


PROVISIONAL
**TECHNICAL
DATA SHEET**

LEATHER WET - EFP030

LEATHER WET - EFP030 is a bioriented embossed polypropylene film with one side flame treated and the other one corona treated.

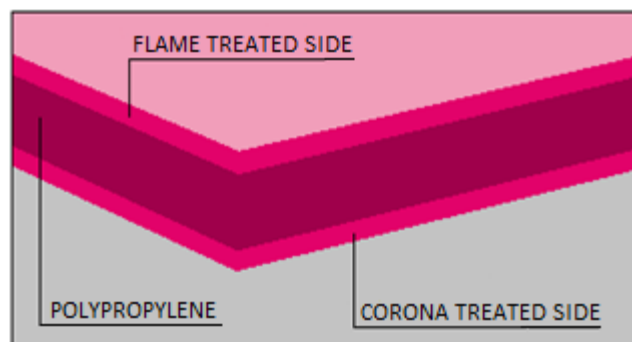

TYPICAL TECHNICAL FEATURES ^(*)

PHYSICAL PROPERTIES	UNIT	VALUE	METHOD
Thickness (<i>base flm</i>)	µm	30	Internal
Thickness (<i>embossed film</i>)	µm	60 ± 10	Internal
Grammage	g/m ²	27 ± 2,7	DIN EN ISO 536

MECHANICAL PROPERTIES		UNIT	VALUE	METHOD
Maximum tensile strength	MD	N/15mm	≥ 54	DIN EN ISO 527-3
	TD		≥ 54	
Elongation at break	MD	%	≥ 50	
	TD		≥ 50	

STORAGE

Store the material in a very dry location (preferably with RH < 40%) at a constant temperature between 18°C and 25°C. Do not leave it exposed to direct sunlight or atmospheric agents.
Partially used reels have to be repacked as originally supplied.

WARRANTY

Material processability is guaranteed up to 6 months since shipment date, as long as it is stored correctly.
It is recommended to condition the material at room temperature at least 24 hours before its use.

DISCLAIMERS

MAG DATA Spa gives no warranty, expressed or implied, as to the suitability of the material for a specific application or characteristic use. An industrial homologation test of the material in actual conditions of purpose is always needed in order to verify its suitability for the specific application or characteristic use.
Before using the material, it is advisable to check the compatibility of the inks and adhesives to be purposed with the type and level of its treatment.

^(*)The information and data contained herein are to be used only as a guideline; therefore, MAG DATA Spa doesn't offer any guarantee on their absolute truthfulness and doesn't accept any liability arising out of their use.