


SILVER LIGHT DRY 22 μ

Metallized printable EVA extruded polyester film with metallic appearance and gloss which provides a high degree of visual appeal. One side is EVA coated for excellent adhesion to all kinds of paper substrates. The other side is printable with special formulation for UV offset printing.

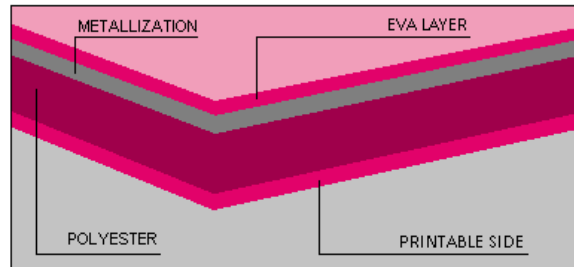

Applications: posters, maps, book covers, shopping bags, magazines, gift boxes, brochures etc.

Product code: PBW022

Update: December 2020

TECHNICAL FEATURES

PHYSICAL PROPERTIES		TEST METHOD	UNIT	VALUE
Thickness		Internal	micron (μm)	22
Grammage		Internal	g/m ²	26,35
Yield		Internal	m ² /kg	37,95
Coefficient of friction	Static	ASTM D 1894	-	-
	Dynamic		-	-
Surface tension	Coated side	ASTM D 2578	Dyne/cm	44-46
	Film side			44

THERMAL PROPERTIES	TEST METHOD	UNIT	VALUE
Recommended lamination temperature	Internal	°C	100-110

Storage: store in a dry and clean place far from heat sources and humidity (max 30°C and 55% of relative humidity). Do not expose rolls to direct sunlight. Protect the partially used rolls and keep a high stock rotation. The film should be allowed to reach operating room temperature 24 hours before use.

Note: trial tests are recommended before proceeding with full production run so as to verify the suitability of the product for its specific application. Verify the compatibility of the film with inks and adhesives. Please visit our web site for more details.

The values indicated represent the best of our knowledge and experience. They are provided simply as a matter of information, taking no responsibility on their absolute truthfulness. Values may be changed without notice. Mag Data S.p.A gives no warranty, expressed or implied, as to the suitability of the product for any specific application.

Mag Data – S.p.A. a socio unico

Strada della Selva 100 - 43052 Colorno (Pr) - Italy

P. IVA/C.F. 02551830348

Tel.: (0039) 0521/525311 Fax: (0039) 0521/525339

E-mail: info@mag-data.com Sito web: www.mag-data.com