


TEMPTATION DRY 30 μ

Polypropylene film with a special coating on one side that gives a smooth tactile sensation and an improved scratch resistance. The other side is coated with EVA Hotmelt for thermal lamination. The optimum processing temperature is between 95 and 115°C (to be checked according to lamination conditions). The film is suitable for hot stamping and spot coatings (test always required).

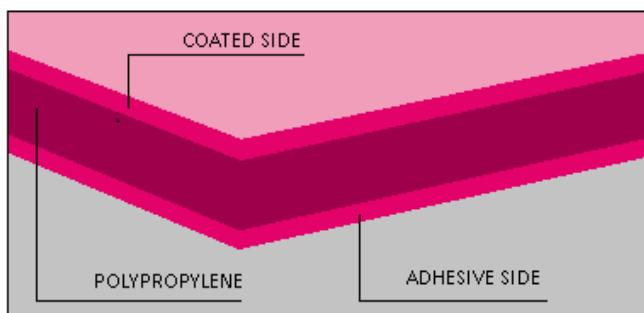

Product code: TTD030
Update: December 2020

TECHNICAL FEATURES

PHYSICAL PROPERTIES	TEST METHOD	UNIT	VALUE
Thickness	Internal	micron (μm)	30
Grammage	Internal	g/m ²	≈ 25,8
Yield	Internal	m ² /kg	≈ 38,8

MECHANICAL PROPERTIES	TEST METHOD	UNIT	VALUE
Tensile strength (base film)	ASTM D 882	kg/mm ²	MD
			TD
Elongation at break (base film)	ASTM D 882	%	MD
			TD

OPTICAL PROPERTIES	TEST METHOD	UNIT	VALUE
Gloss 85°	ASTM D 2457	GE	20±3

Storage: store in a dry and clean place far from heat sources and humidity (max 30°C and 55% of relative humidity). Do not expose rolls to direct sunlight. Protect the partially used rolls and keep a high stock rotation. The film should be allowed to reach operating room temperature 24 hours before use.

Note: trial tests are recommended before proceeding with full production run so as to verify the suitability of the product for its specific application. Verify the compatibility of the film with inks and adhesives. Please visit our web site for more details.

The values indicated represent the best of our knowledge and experience. They are provided simply as a matter of information, taking no responsibility on their absolute truthfulness. Values may be changed without notice. Mag Data S.p.A gives no warranty, expressed or implied, as to the suitability of the product for any specific application.